Instant Screen™

Tension Rod

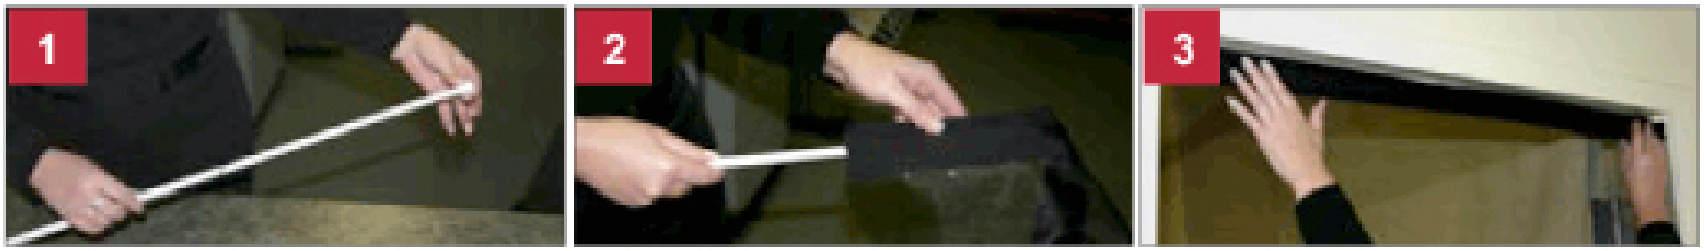

1. Unscrew tension rod to lengthen rod just short of frame's width.
2. Place rod in the premade slot on the top of the screen.
3. Place tension rod into frame and unscrew rod out to secure firmly to frame.

Velcro™

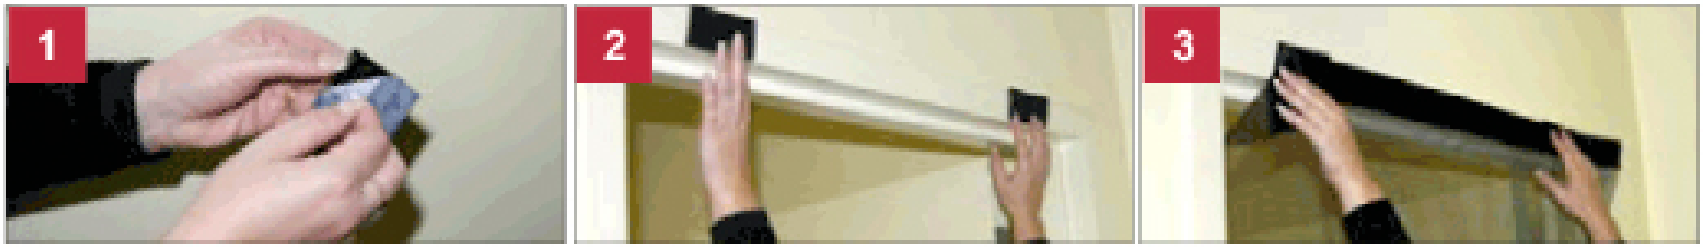

1. Unpeel backing on Velcro strip.
2. Attached to top of frame to farthest width points and evenly spaced
3. Attach screen by attaching cloth backing at the top of the screen to Velcro hooks.